Ceiling Fan Light Kit

(sold separately)

Assembly & Installation Instructions
Model 72199
SKU# 406-358

Read & Save these instructions

Caution: Read instructions carefully and turn electricity off at main circuit breaker panel before beginning installation.

Warning: If any Special Control Devices are used with this fixture, follow the instructions carefully to assure full compliance with N.E.C. Requirements. If there are any questions, contact a licensed qualified electrical contractor.

1. Remove the fan switch cup cover from the fan assembly by removing the three mounting screws and unplugging the molded adaptor connectors.

2. Remove the center plug from the switch cup cover.

3. Remove the lock washer and hex nut from the top of the light kit. Insert the black and white wires from the light kit through the center hole of the switch cup cover , thread the switch cup cover onto the light kit. Re-install lock washer and hex nut and tighten securely.

4. Locate the blue and white wires inside the switch cup for the light kit connection. Connect the blue wire from the switch cup to the black wire from the light kit and the white wire from the switch cup to the white wire from the light kit. Re-connect adaptor connectors unplugged in step 1.

5. Re-attach the switch cup cover to the switch cup of the fan assembly by aligning the three screw holes on the switch cup cover with the screw holes on the switch cup and secure with the screws removed in step 1.

For fan with pull chain (Figure 1), please go to below steps:

6. Install two 13 watt GU-24 CFL bulbs into the light kit socket.

7. Pass the fan switch chain through the hole in the bowl cap of the light kit. Position the glass bowl over the threaded nipple and raise the glass bowl up to the bowl cap. Pass the fan pull chain through the side hole in the outer bowl cap and install the outer bowl cap on the threaded nipple. Install the finial finger tight.

CAUTION: Be sure that the fan switch chain does not make contact with the light bulbs. If necessary re-position the light kit to avoid the fan switch from touching the light bulbs.

8. Attach the pull chain extensions provided to the light switch chain and the fan switch chain.

For fan without pull chain (Figure 2), please go to below steps:

6. Install two 13 watt GU-24 CFL bulbs into the light kit sockets.

7. Position the glass bowl over the threaded nipple and raise the glass bowl up the bowl cap. Install the outer bowl cap on the threaded nipple (using the outer bowl cap with centre hole only provided in the package). Install the finial finger tight.

8. Attach the pull chain extension provided to the light switch chain.

Caution: All glass is fragile, use care when handling glass shade and lamp.

Caution: Allow the bulb and glass shade to cool completely before touching or replacing to avoid accidental burning of the skin.

Caution: To Reduce the Risk of Fire and Electric Shock, This Light Kit Should Be Used Only With The Fan Models(SKU#) Listed Below: 52-PN(SKU# 158-112,156-991, 157-734) ,Manufactured By Chienluen Industries (ZhongShan) Ltd.

Weight of the light kit: 1.5KGS

UL Model No: LK-52PN

2-Year Limited Warranty

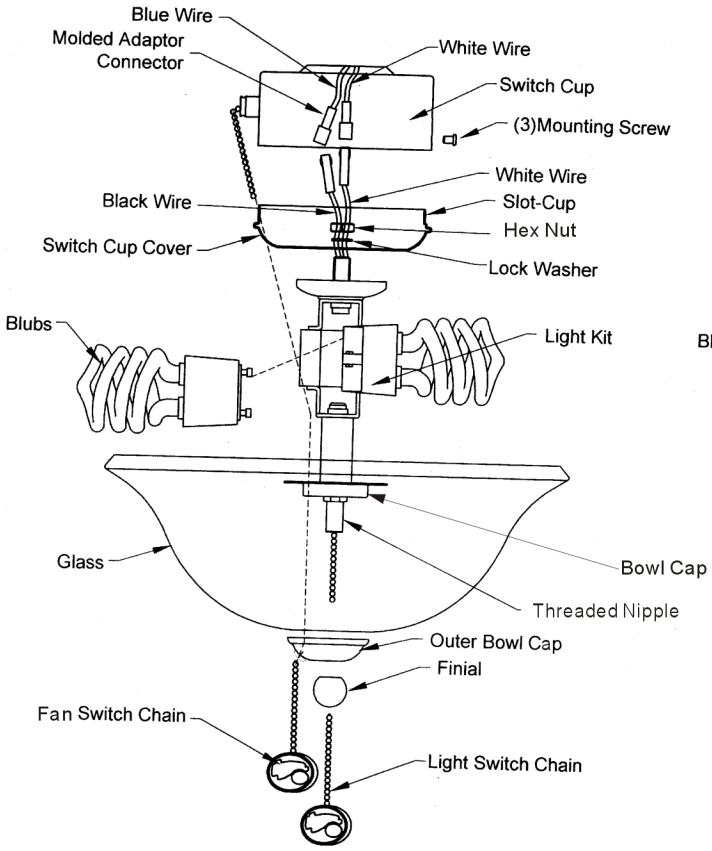

Figure 1

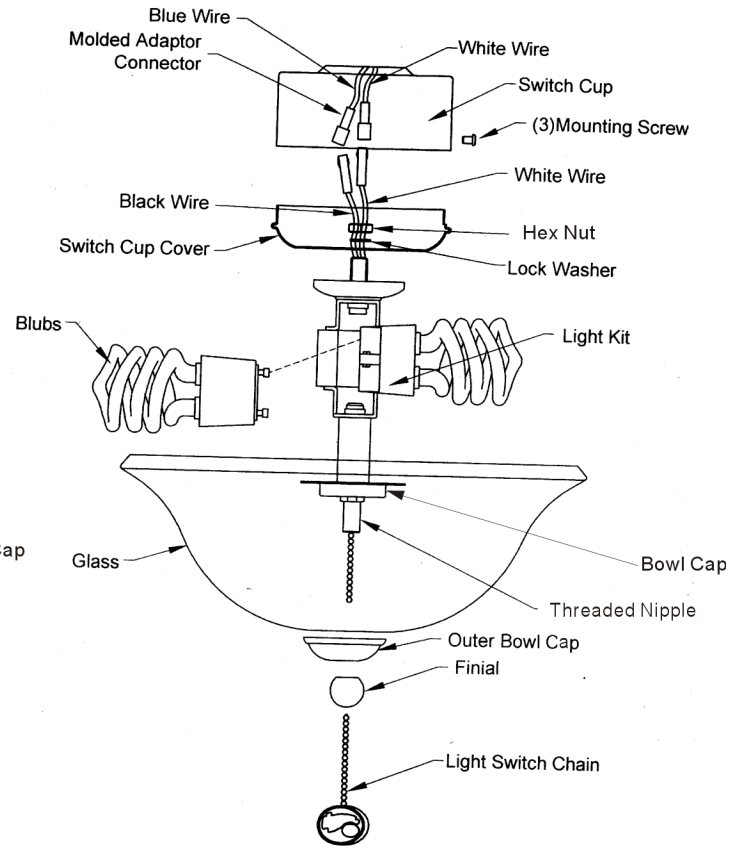

Figure 2